



BEDDING THERMOPLASTIC COMPOUNDS



EKOPREN[®]

mixercompounds.com



PVC/PVC Tandem



DENSITY
g/cm³

HARDNESS
SHORE

LOI
%

PROPERTIES

EKOPREN® 3RPO8E

1,91

78 (A)

-



XLPE/PVC Tandem

DENSITY
g/cm³

HARDNESS
SHORE

LOI
%

PROPERTIES

EKOPREN® 3RP061

1,93

72 (A)

-



EKOPREN® 3RP601

1,91

80 (A)

-



Halogen
Free



Low PAH



Phthalate
Free



RoHS



Black



Drummable



Easy
Peeling



Flexible



Fire
Resistant



For CPR



High Speed
Extrusion



Low Smoke
Emission






Migration
Resistant



XLPE/HFFR Tandem



	DENSITY g/cm ³	HARDNESS SHORE	LOI %	PROPERTIES
EKOPREN® 3RP57H	1,82	80 (A)	60	 CPR
EKOPREN® 3RP78E	1,85	85 (A)	85	 CPR 
EKOPREN® 3RP931	1,84	33 (D)	45	



Halogen Free



Low PAH



Phthalate Free



RoHS



Black



Drumable



Easy Peeling



Flexible



Fire Resistant



For CPR



High Speed Extrusion



Low Smoke Emission



Migration Resistant







XLPE/HFFR Drummable



	DENSITY g/cm ³	HARDNESS SHORE	LOI %	PROPERTIES
EKOPREN® 3RP321	1,80	82 (A)	35	
EKOPREN® 3RP371	1,70	85 (A)	65	CPR



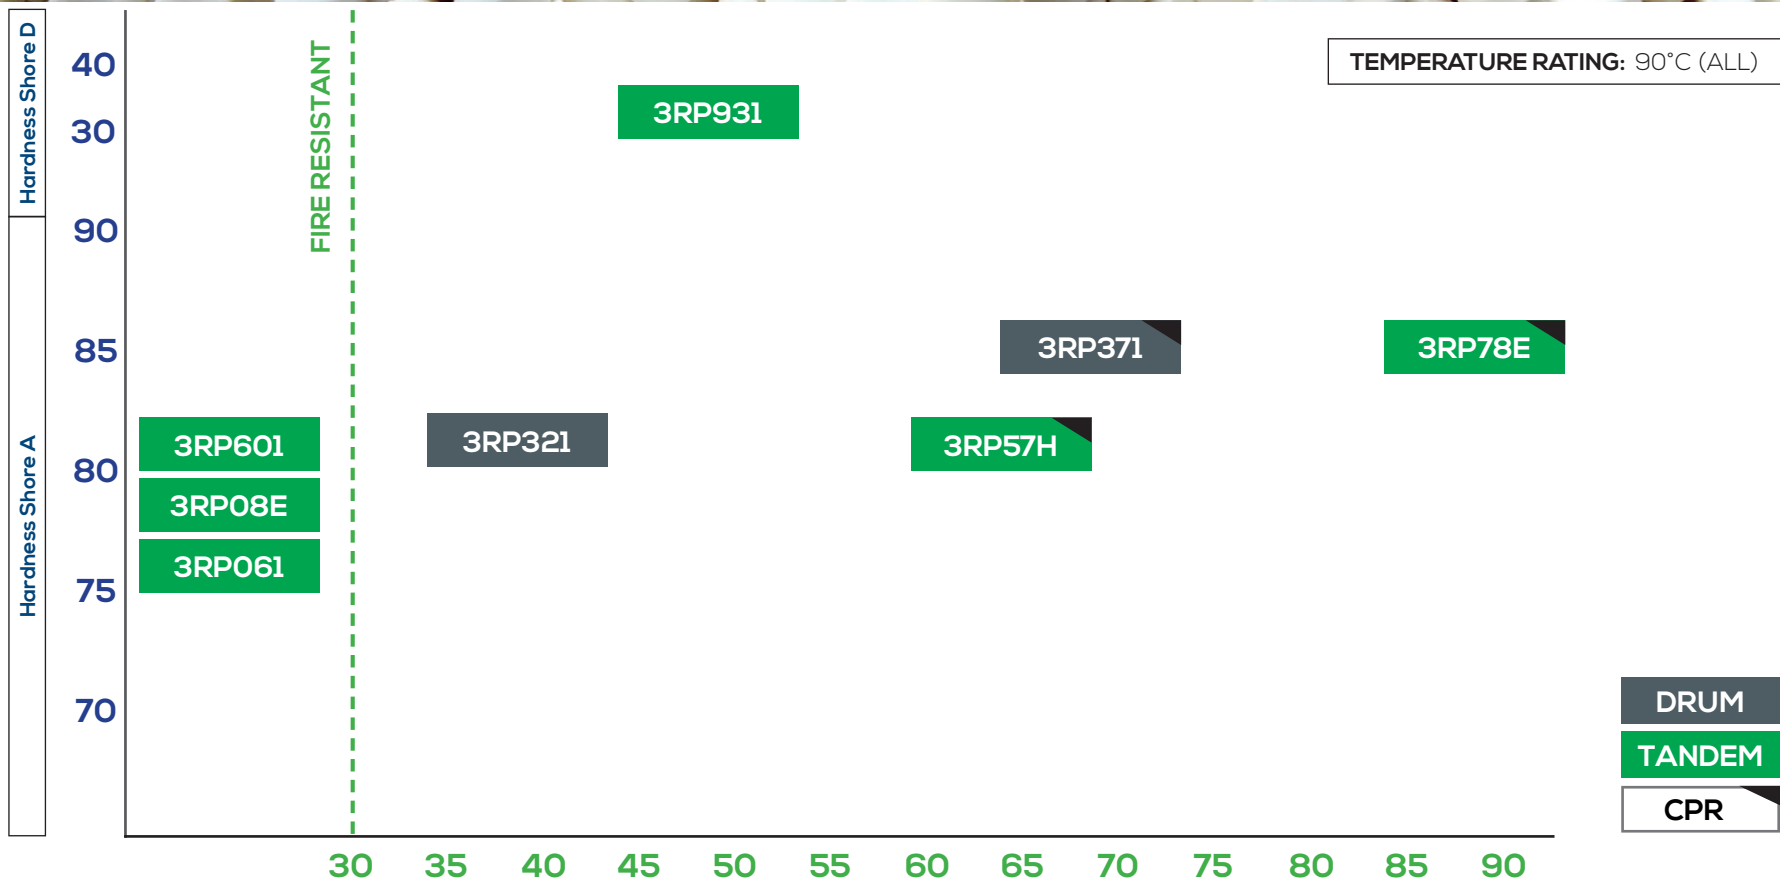



mixercompounds.com
info@mixercompounds.com