




MIXER[®]
COMPOUNDS
DETAILS MATTER.

LOW VOLTAGE RUBBER COMPOUNDS

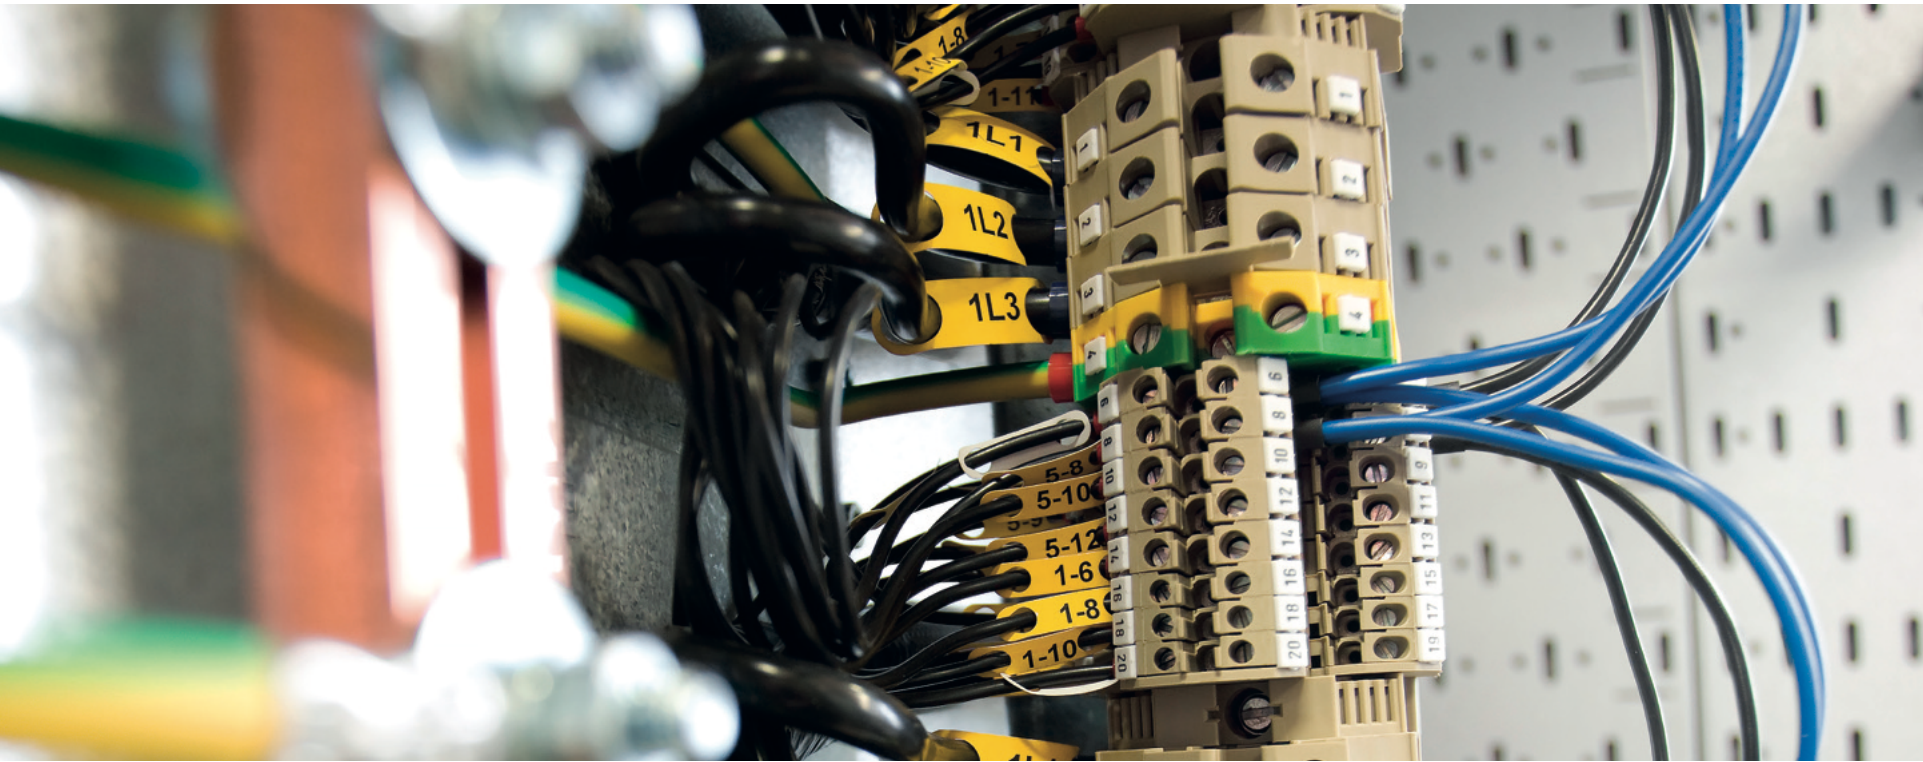

EKOPREN[®]

mixercompounds.com

EPDM



	APPLICATION	TS MPa	EB min %	DENSITY g/cm ³	HARDNESS SHORE	LOI %	PROPERTIES
EKOPREN® 3IS051	EI4	6	200	1,52	79 (A)	-	DCP, Flexible, High Speed Extrusion, Single-core Cables
EKOPREN® 3IS061	EI4-EI7	6	200	1,49	76 (A)	-	Flexible, Oil Resistant, Single-core Cables
EKOPREN® 3IS07E	EI4-EI6-EI7	6,5	200	1,48	79 (A)	-	Flexible, Low Compr. Set, Single-core Cables
EKOPREN® 3IS111	HEPR-G7	9	200	1,32	84 (A)	-	DCP, Single-core Cables
EKOPREN® 3IS62G	3GI3-EVI2	8	200	1,42	78 (A)	-	Flexible, Single-core Cables
EKOPREN® 3IS671	EI4-EI7 FR	6	200	1,46	80 (A)	23	Fire Resistant, Single-core Cables



HFFR




	APPLICATION	TS MPa	EB min %	DENSITY g/cm ³	HARDNESS SHORE	LOI %	PROPERTIES
EKOPREN® 3IS771	EI5-EI101-EI102 EI103-EI04	10	160	1,56	40 (D)	30	
EKOPREN® 3IS781	EI8	9	250	1,44	85 (A)	27	
EKOPREN® 3IS821	G18	9	150	1,45	87 (A)	27	
EKOPREN® 3IS831	G18	10	150	1,48	42 (D)	29	
EKOPREN® 3IS871	G17	13	130	1,56	48 (D)	40	
EKOPREN® 3IS901	EI8-EI5-EI3	10	200	1,44	85 (A)	26	
EKOPREN® 3IS921	EI5-G9	13	160	1,52	43 (D)	30	
EKOPREN® 3IS971	EI8-EI3	7	250	1,50	87 (A)	29	
EKOPREN® 3IS981	PV EN 50618	13	200	1,51	40 (D)	28	






EPDM

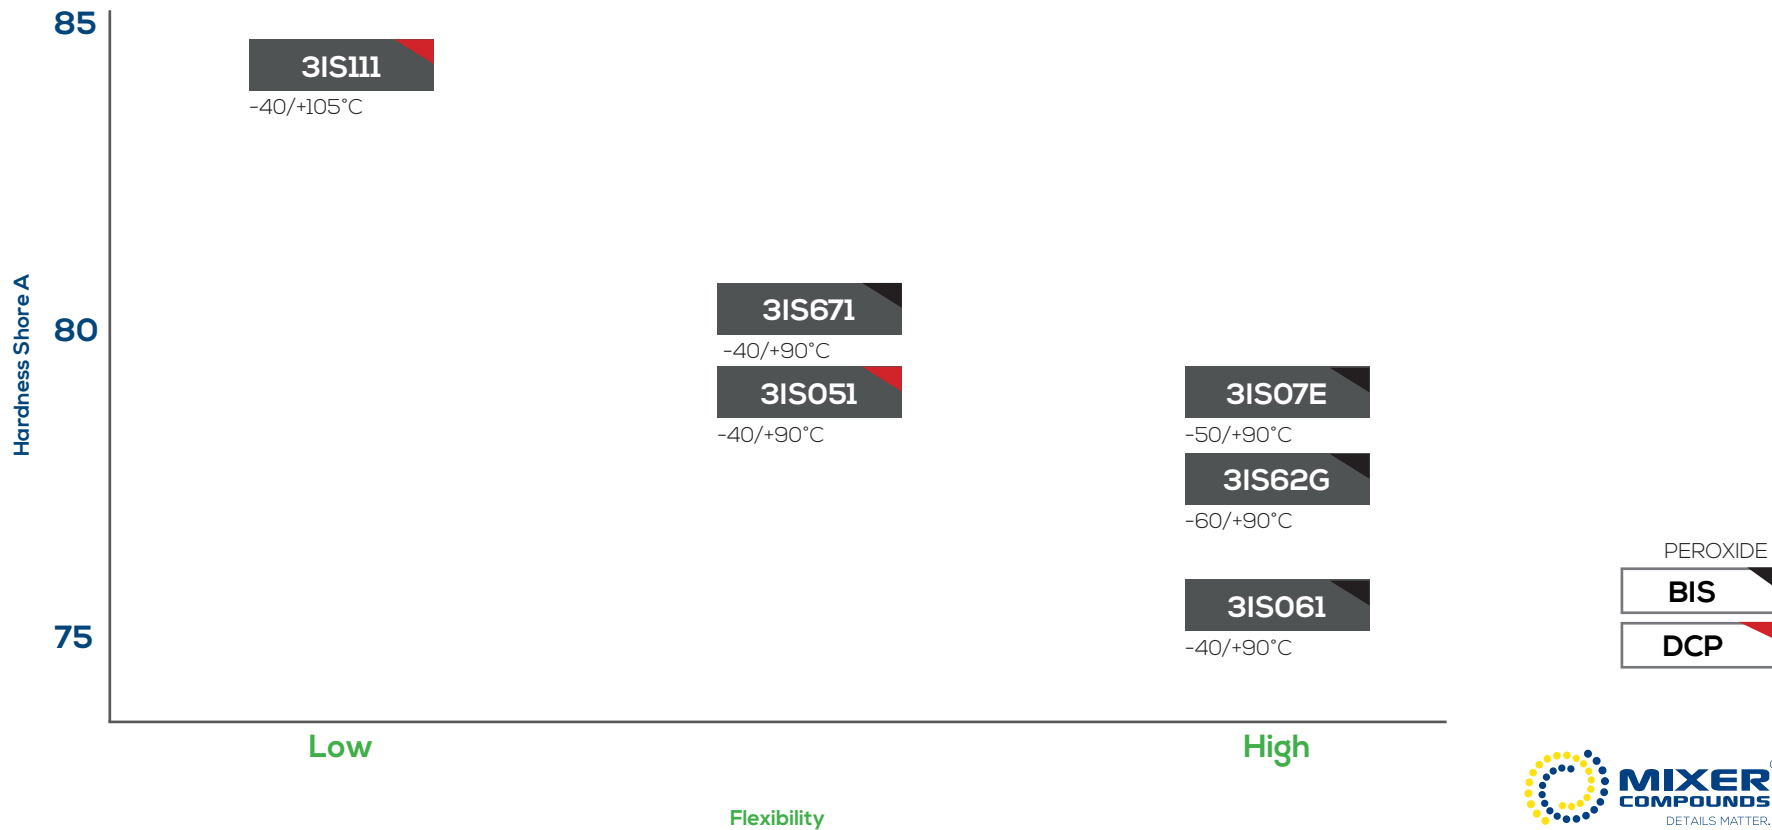



HFFR

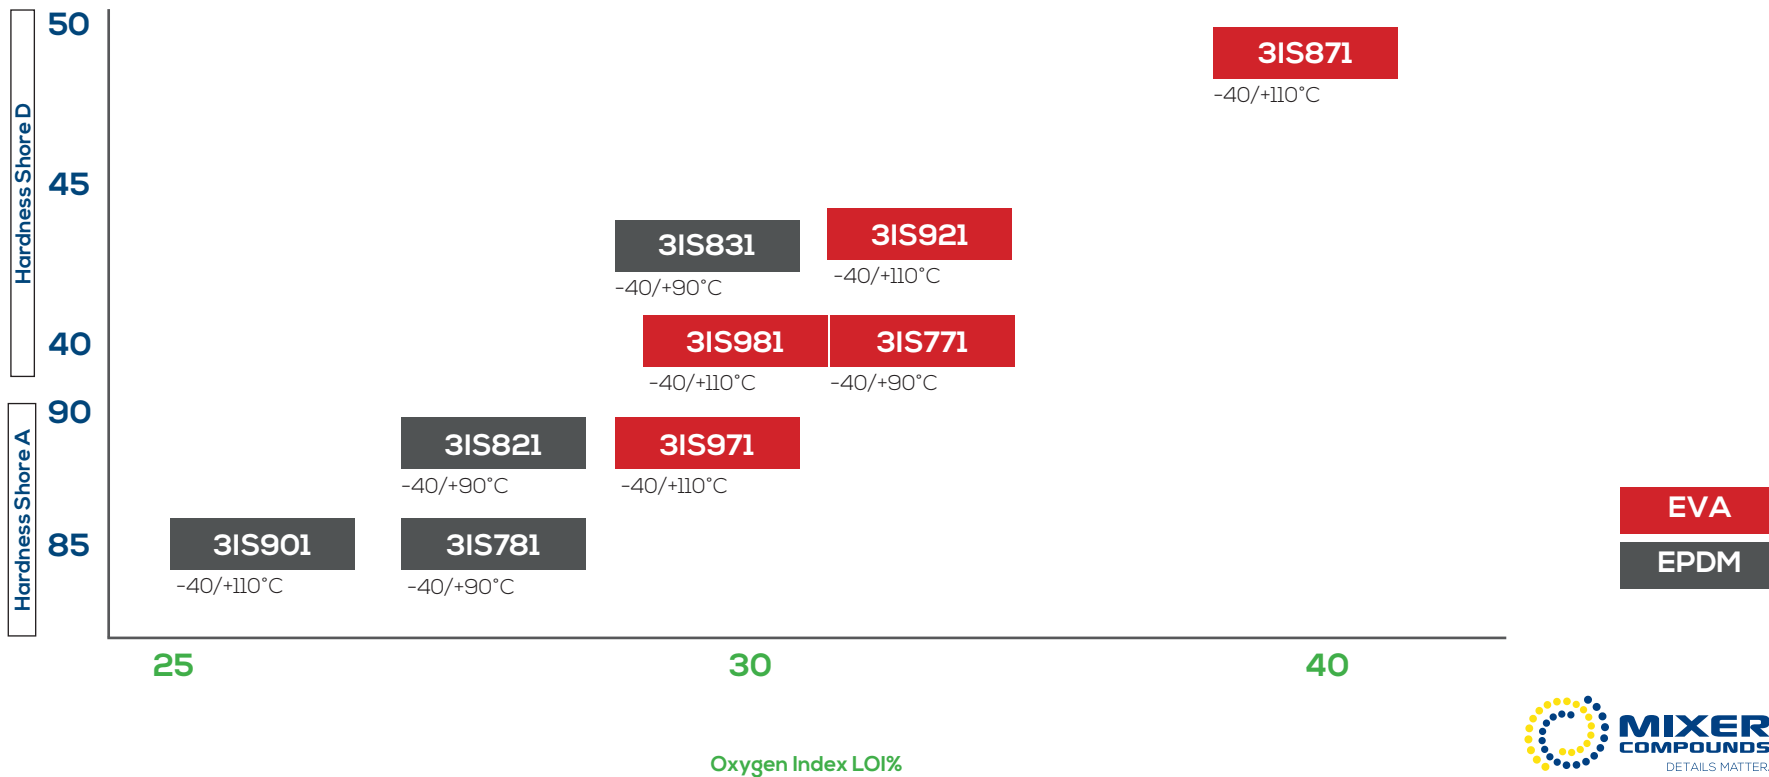



mixercompounds.com
info@mixercompounds.com